



## Short Link Chain

### grade 8


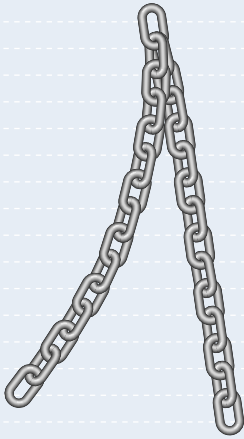


- **Material** : alloy steel, grade 8, heat treated
- **Safety factor** : MBL equals 5 x WLL
- **Finish** : self colour or black powder coated
- **Certification** : as standard a works certificate is supplied

diameter	length inside	width outside	working load limit	weight per metre
a mm	b mm	c mm	kg	kg
7	21	23	1500	1.10
8	24	26.8	2000	1.40
10	30	34	3150	2.20
13	39	43.5	5300	3.80
16	48	53.5	8000	5.70
20	60	67	12500	9.00
22	66	73.5	15000	10.90

## Welded Straight Link Chain

### mild steel, commercial quality



- **Material** : mild steel, grade 3
- **Finish** : self colour, electro-galvanised or hot dipped galvanised
- **Note** : supplied in reels only as shown below
- **Special Note** : this product is not suitable for lifting purposes

diameter	length inside	width outside	quantity per reel	weight per reel
a mm	b mm	c mm	m	kg
2.5	14	12	60	8.20
2.5	19	12	60	6.90
3	16	14	60	11.40
3	21	14	60	10.60
3	26	14	60	9.00
4	19	17	30	10.40
4	26	17	30	9.50
5	21	21	25	13.30
5	28	21	25	12.50
6	24	25	20	15.70
6	33	25	20	14.30
6	42	25	20	13.60