


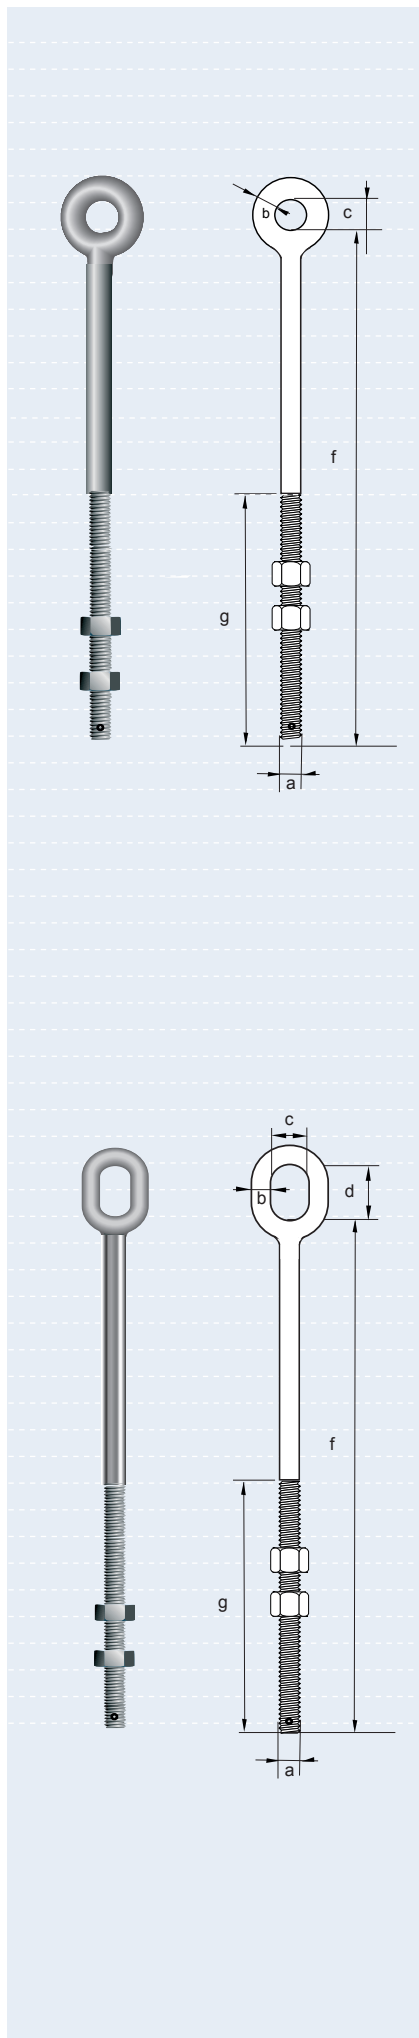

Eyebolts Without Collar

metric coarse thread

- **Material** : high tensile steel
- **Safety Factor** : MBL equals 8 x SWL
- **Standard** : B.S. 5655 - part 8 - 1983
- **Finish** : self colour
- **Certificates** : this product is supplied with a works certificate as standard

working load limit	diameter thread	diameter rope	diameter eye	diameter eye inside	nominal length	length thread	weight each
tonnes	a mm	mm	b mm	c mm	f mm	g mm	kg
0.20	10	6.5	10	15	150	115	0.16
					300	230	0.20
0.31	12	8	12	15	150	115	0.30
					300	230	0.42
0.60	16	11	17	21	300	230	0.80
					450	345	0.93
					600	460	1.14
0.83	20	13	20	24	450	345	1.47
					600	460	1.77
					750	575	2.10
1.27	24	16	24	27	450	345	2.87
					600	460	3.40
					750	575	4.00
1.79	30	19	29	34	600	460	6.50
					750	575	6.90

Eyebolts Without Collar

BSW thread

- **Material** : high tensile steel
- **Finish** : self colour
- **Standard** : B.S. 529 - Part 2
- **Certificates** : this product is supplied with a works certificate
- **Special Note** : this product should only be used for repairing existing lift ropes the standard is now obsolete, please refer to B.S. 5655 - part 8 for new installations

working load limit	diameter thread	diameter eye	diameter eye inside	length eye inside	nominal thread	length thread	weight each
cwts	a inch	b inch	c inch	d inch	f inch	g inch	kg
8	1/2	1/2	3/4	1 1/8	12	9	0.42
					18	13 1/2	0.54
					24	18	0.68
13	5/8	1/2	1	1 5/8	18	13 1/2	0.93
					24	18	1.14
20	3/4	3/4	1 1/4	1 3/4	18	13 1/2	1.47
					24	18	1.77